

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE




LEAD-FREE LEGENDPRESS® EXTENDED 90° STREET ELBOW

Extended 90° Street Elbow

Intended for use with Legend's Bronze Insert Stiffener (450-404P), to make a connection from a finned tube (radiator) through finished flooring. The extended street elbow should not be pressed onto a finned tube unless the insert stiffener is utilized.

Working Pressure, Non Shock (PSI)


Cold working pressure (CWP): 200 psi
Saturated steam (WSP): 15 psi
Operating temperature range: 0-250° F

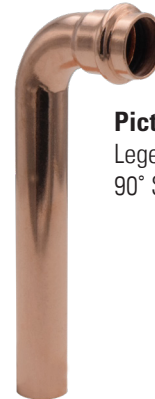

Pictured:
LegendPress Extended
90° Street Elbow

MATERIAL SPECIFICATION			
PART	MATERIAL	SPECIFICATION	
1 Elbow	WROT copper alloy	ASTM B152 C11000 and ASTM B75 C12200	
2 O-ring	EPDM	Commercial grade	

DIMENSIONS					
Size	A	B	C	D	E
	4.92"	1.61"	0.86"	3/4"	3/4" CTS

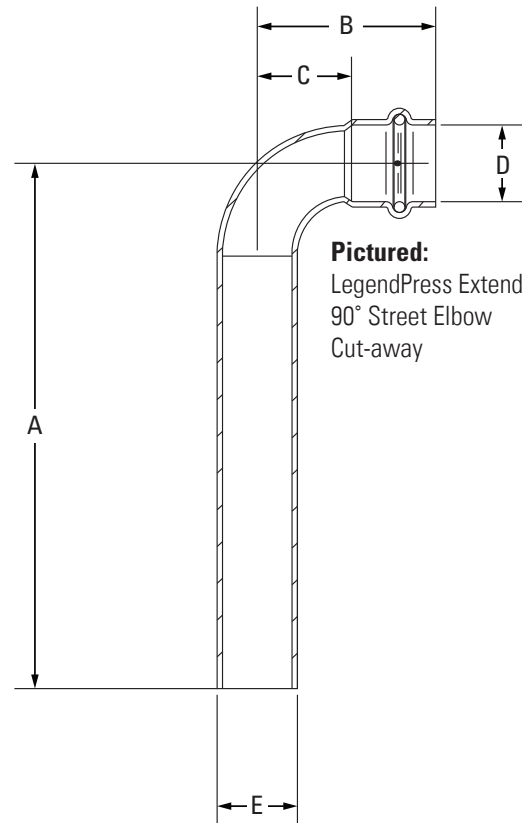

Pictured:
LegendPress Extended
90° Street Elbow
Cut-away

Certifications/Listings:

NSF/ANSI: Drinking water components - Health effects.
NSF/ANSI 372: Drinking water system components lead content.
Uniform plumbing code (UPC).
National plumbing code of Canada.

Standards:

ASTM B152 Alloy C11000: Standard Specification for Copper Sheet, Strip and Plated Rolled Bar.
ASTM B75 Alloy C12200: Standard Specification for Seamless Round Copper Tube for general engineering applications.
ANSI/ASME B16.51: Standard Specification for Copper and Copper Alloy Press-Connect Pressure Fittings.
ANSI/ASME B16.22: Standard Specification for Wrought Copper and Copper Alloy Solder Joint Pressure Fittings.
ANSI/ASME B1.20.1: Pipe threads, general purpose, Inch.