

## SUBMITTAL SHEET

JOB NAME		ITEM TAG
JOB LOCATION		PART NUMBER
CONTRACTOR	DATE	
ENGINEER APPROVAL	DATE	

# NO LEAD BALL TYPE HOSE BIBB

## P-537NL

Durable forged brass construction.

The positive-shutoff ball-and-seat design is a more durable alternative to traditional stop-type valve designs.

Maintenance-free dual O-ring stem seal eliminates the need for packing-nut tightening.

Smooth quarter-turn operation with all handle configurations.

Ideal for all residential and commercial hose bibb requirements.


Available in sizes: 1/2" or 3/4" Press x 3/4" GHT.

### Working Pressure, Non Shock (PSI)


Cold working pressure (CWP): 200 psi  
Saturated steam (WSP): Not suitable for steam applications

MATERIAL SPECIFICATION		
PART	MATERIAL	SPECIFICATION
1 Body	Lead-free forged brass	UNS Alloy C46500
2 Ball	Lead-free chrome-plated forged brass	UNS Alloy C46500
3 Handle	Aluminum	Commercial grade
4 Press O-ring	EPDM rubber	Commercial grade

DIMENSIONS - Inch					
Model	Size	A	B	C	D
P-537NL	1/2"	3.35	1.12	1.44	0.4
	3/4"	3.45	1.12	1.44	0.4

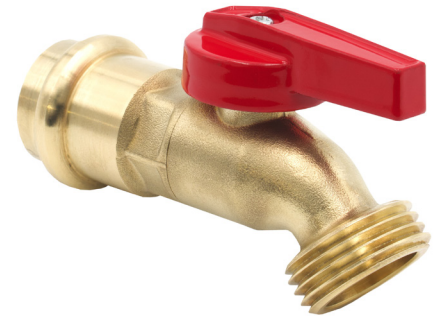

**Pictured:**  
P-537NL Product Photo

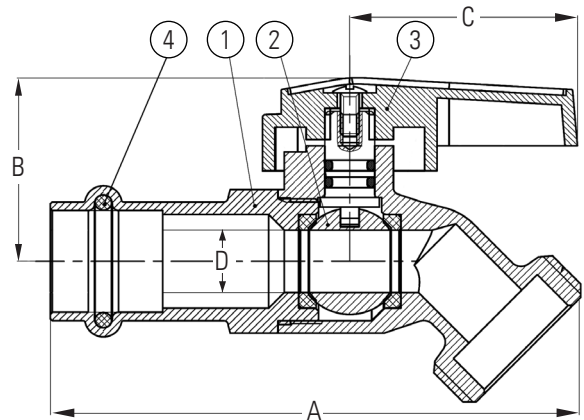

**Pictured:**  
P-537NL Cut-Away View

### Certifications/Listing:

Third-party certified.  
NSF/ANSI 61: Drinking water system components - Health effects.  
NSF/ANSI 372: Drinking water system components - Lead content.

### Standards:

ANSI/ASME B16.51: Copper and copper alloy press-connect pressure fittings  
ANSI/ASME B1.20.7: Hose coupling screw threads, Inch