

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

SUMP CHECK

S-613

Reversible end adapters allow for installation on 1-1/4" or 1-1/2" pipe (smaller size only).

Can be installed in either vertical (upward flow) or horizontal (flapper hanging) positions.

Designed for low pressure sump pump discharge systems. Not suitable for compressed air or steam service.

Working Pressure, Non Shock (PSI)

Maximum back pressure: 10 feet of head Maximum service temperature: 130°F

MA	MATERIAL SPECIFICATION				
	PART	MATERIAL			
1	Upper body segment	ABS			
2	Lower body segment	ABS			
3	Flapper	EPDM Rubber & Stainless weight			
4	Screw (4)	Stainless Steel			
5	Nut (4)	Stainless Steel			
6	End adapter (2)	Flexible PVC			
7	Clamp (4)	SS band & screw			

DIMENSIONS					
Size	Α	В	C*		
1-1/4" (1)	2.68"	6.63"	5.00"		
1-1/2" (1)	2.68"	8.00"	6.00"		
2"	3.72"	10.63"	7.50"		


(1) Same item with different boot direction.



Pictured: 1¼"-1½" S-613



Pictured: (2") S-613

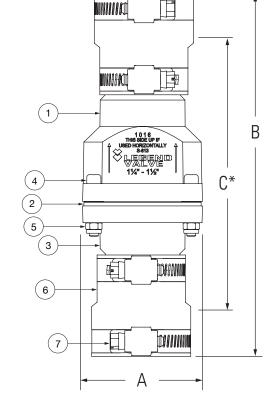

Pictured: S-613 ISO View

EMIIIIIIIII

Section

Pictured: S-613 detail

^{*} Minimum distance between pipes