

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

STAINLESS STEEL PEX CLAMP RINGS

CLAMP RINGS

360° uniform compression surface pressure.
Closed Interlock: high radial loads, smooth outer contour.
For use with a ratcheting cinch tool with visual indicator.
Not for use with PEX-AL-PEX.

Working Pressure, Non Shock (PSI): 100 psi
Maximum working temperature: 180°F

MATERIAL SPECIFICATION	
PART	MATERIAL
1 PEX cinch ring	304 stainless steel



Pictured:
SS PEX Clamp Ring




Pictured:
SS PEX Non-Slip Clamp Ring

DIMENSIONS					
	A	A	B	C	D
Size	Standard	Non-Slip	Non-Slip	All	All
3/8"	0.52	0.5	0.54	0.43	0.28
1/2"	0.69	0.62	0.68	0.56	0.28
3/4"	0.92	0.86	0.93	0.79	0.35
1"	1.16	1.13	1.22	1.04	0.39



Pictured:

Standard Clamp

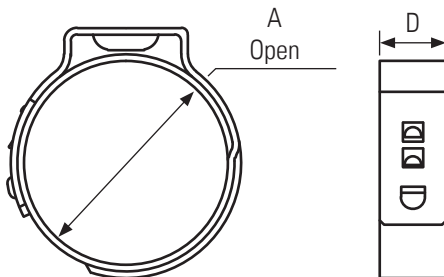

Pictured:

Non-Slip Clamp

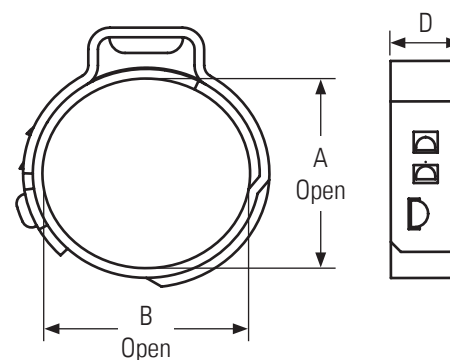

Certifications/Listing:

Third-party certified
ANSI/NSF 14: Plastic piping system components and related materials.
ASTM F2098: Stainless steel clamps for securing to metal insert and plastic insert fittings.