

**SUBMITTAL SHEET**

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

**NO LEAD COMPRESSION TEE**

**T-4451NL**

Designed and manufactured for the repair of, or new underground water service applications only.


Grip ring compression end connections provide pull out resistance.

Insert stiffeners (Model T-4500, sold separately) are required when installing on Polyethylene (PE) plastic pipe.

Available in nominal sizes 3/4" & 1" CTS.

**Specifications:**


Manufactured in compliance with the latest version AWWA C800, for high pressure.

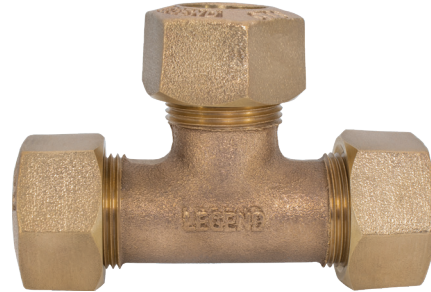

**Pictured:  
T-4451NL**

MATERIAL SPECIFICATION		
PART	MATERIAL	
1	Body	Lead-Free Cast Bronze
2	Compression Nut	Cast Bronze
3	Gasket	Buna-N (NBR) Nitrilic Rubber
4	Grip Ring	Stainless Steel

DIMENSIONS		
Size	A	B
3/4"	2.6"	1.3"
1"	2.5"	1.25"
3/4" x 1"	3.14"	1.5"

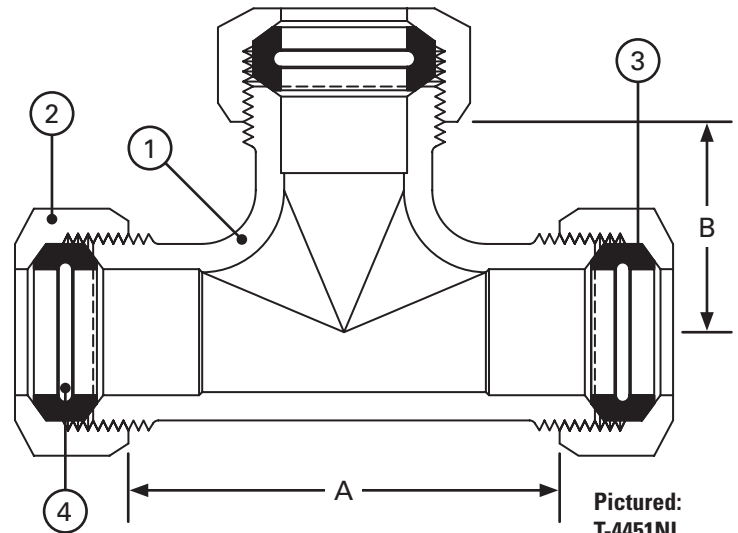

**Pictured:  
T-4451NL  
Cut-away**

**Certifications/Listings:**

NSF/ANSI 61: Drinking water system components - Health effects.  
NSF/ANSI 372: Drinking water system components - Lead content.

**Standards:**

AWWA C800: Underground service line valve and fittings.