

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

NO LEAD QUARTER-TURN BALL-TYPE CHROME SUPPLY STOP

T-595NL & T-596NL F1960 Cold-Expansion Inlet Connection

F1960 cold-expansion PEX inlet connection utilizes an exaggerated center barb and PEX reinforcing ring (not included) for a permanent, leak-free connection.

Quarter-turn, self-cleaning ball valve design resists mineral and scale build-up, assuring positive shutoff and re-opening.

The ball-seat operation and dual O-ring stem seal features, out-perform traditional multi-turn stop designs.

Compact no lead forged brass chrome plated bodies are both durable and decorative.

An ideal upgrade replacement for worn, leaking stops that won't close completely.

Available in 3/8" O.D. or 1/4" O.D. compression outlet connections.

Working Pressure, Non Shock (PSI)

Cold working pressure (CWP):	125 CWP
Maximum service temperature:	180°F*

*Temperatures above 120°F increase the risk of scalding. Consult local code for temperature requirements.

MATERIAL SPECIFICATION		
PART		MATERIAL
1	Handle screw	Plated carbon steel
2	Handle	Chrome-plated ABS
3	Stem	No lead brass
4	Stem O-ring (2)	NBR (Buna-N) rubber
5	Compression ferrule	Brass
6	Compression nut	Chrome plated brass
7	Body	No lead chrome plated brass
8	Seat (2)	EPDM rubber
9	Ball	No lead chrome plated brass
10	End Adapter	No lead chrome plated brass

DIMENSIONS - Inch			
Nominal Inlet x O.D. Outlet		A	B
T-595NL Angle configuration: Cold-expansion PEX inlet x compression outlet			
1/2" F1960 PEX barb x 1/4" OD		1.02	2.32
1/2" F1960 PEX barb x 3/8" OD		1.10	2.32
T-596NL Straight configuration: Cold-expansion PEX inlet x compression outlet			
1/2" F1960 PEX barb x 1/4" OD		1.10	2.28
1/2" F1960 PEX barb x 3/8" OD		1.10	2.36

Certifications/Listings:


Third-party certified.
 NSF/ANSI 14: Plastic piping system components and related materials.
 NSF/ANSI 61: Drinking water system components health effects.

Standards:


ASTM F1960: Cold Expansion fittings with PEX reinforcing rings.




Pictured:
T-595NL
F1960 Cold-expansion



Pictured:
T-596NL
F1960 Cold-expansion

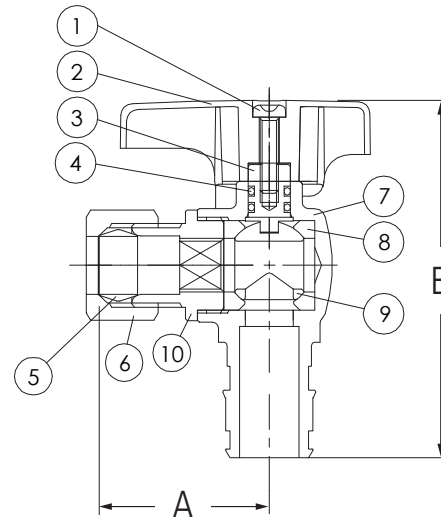

Pictured:
T-595NL F1960
Cold-expansion
Cut-away

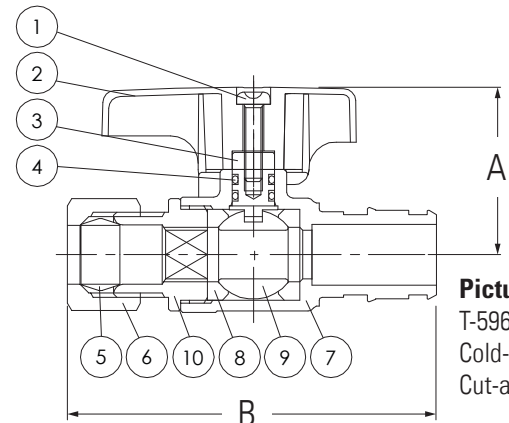

Pictured:
T-596NL F1960
Cold-expansion
Cut-away