


**SUBMITTAL SHEET**

JOB NAME		ITEM TAG
JOB LOCATION		PART NUMBER
CONTRACTOR	DATE	
ENGINEER APPROVAL	DATE	

**VERSATHERM™**

**Snap-Fit Floor System**

Compatible with 1/2" radiant tubing manufactured in compliance with ASTM F876 (PEX); ASTM F2623 (PE-RT) or ASTM F1281 (PEX-AL-PEX).

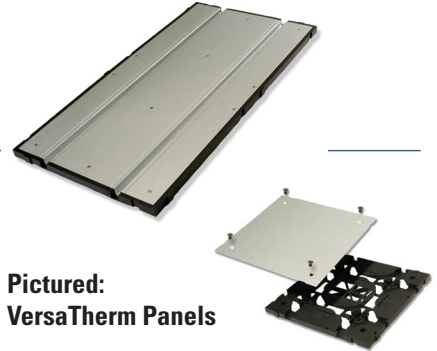


**Pictured:  
VersaTherm Panels**

**Specifications:**

Point Load: 165 psi @ 0.33" deflection (no cover; not structural)

Max Working Temp: 200° F

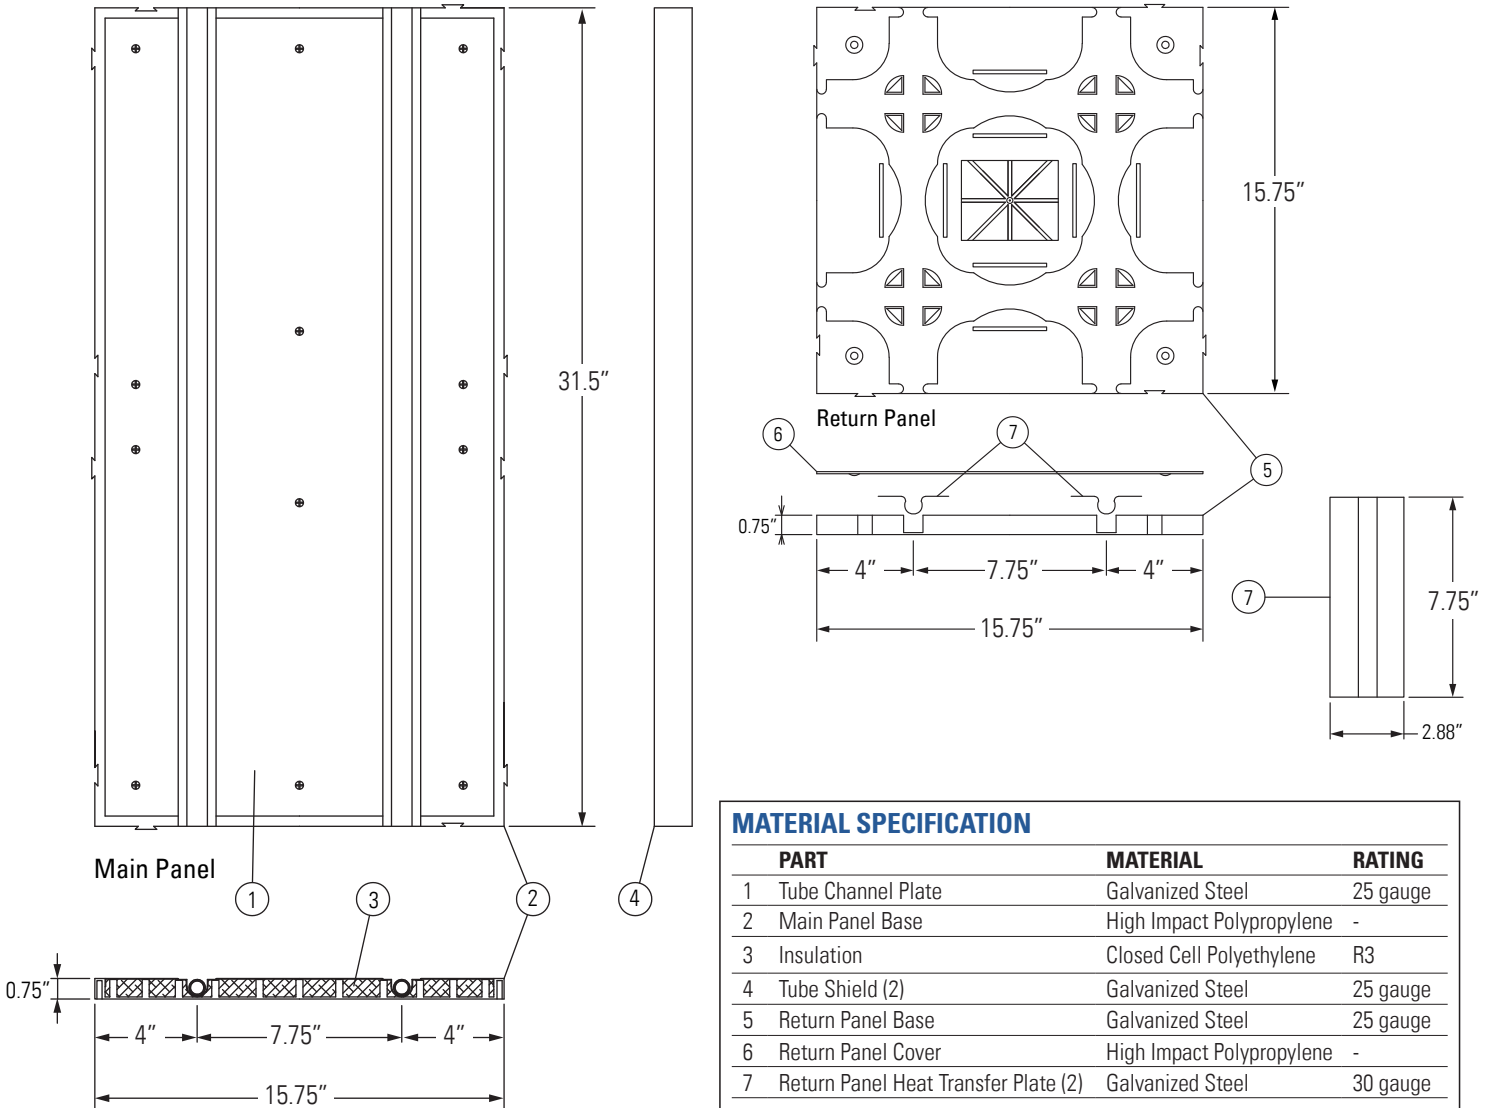

MATERIAL SPECIFICATION		
PART	MATERIAL	RATING
1	Tube Channel Plate	Galvanized Steel 25 gauge
2	Main Panel Base	High Impact Polypropylene -
3	Insulation	Closed Cell Polyethylene R3
4	Tube Shield (2)	Galvanized Steel 25 gauge
5	Return Panel Base	Galvanized Steel 25 gauge
6	Return Panel Cover	High Impact Polypropylene -
7	Return Panel Heat Transfer Plate (2)	Galvanized Steel 30 gauge

**SUBMITTAL SHEET**

JOB NAME		ITEM TAG
JOB LOCATION		PART NUMBER
CONTRACTOR	DATE	
ENGINEER APPROVAL	DATE	

