GET A GRIP!

with the T-550

Legend has improved the performance of the **T-550** quarter-turn, frost-free sillcock with a higher flow capacity!

- Patented Softouch™ rubberized handle makes it easy to grip.
- Quarter-turn operation makes positive shut-off easy.
- Unique large, angled flange means it drains better, installs easily and looks great.
- Anti-chatter design eliminates annoying clanging noises.
- Ceramic disc design offers proven reliability insuring years of trouble-free operation.
- Higher durometer "O" rings offer greater resistance to freezing.
- Certified to ANSI/NSF 61-9.

Now Available in



Downstream Thinking
It's all about Performance™

LEGEND
PLUMBING • INDUSTRIAL • COMMERCIAL • HYDRONICS

LEGEND
PLUMBING • INDUSTRIAL • COMMERCIAL • HYDRONICS

www.legendvalve.com
1-800-752-2082

SUBMITTAL SHEET

JOB NAME | ITEM TAG

JOB LOCATION | PART NUMBER

CONTRACTOR | DATE

ENGINEER APPROVAL | DATE

QUARTER TURN ANTI-SIPHON FROST FREE SILLCOCK

T-550

Patented Softouch rubber-clad handwheel

Quarter-turn Operation

Dual ceramic discs offer durable, positive shutoff

Oversized, angled mounting flange with screw slots

Durable corrosion-resistant chrome-plated body

- ANSI / NSF 61-9 Certified
- A.S.S.E 1019, Type A Certified
- cUPC / IAPMO Approved



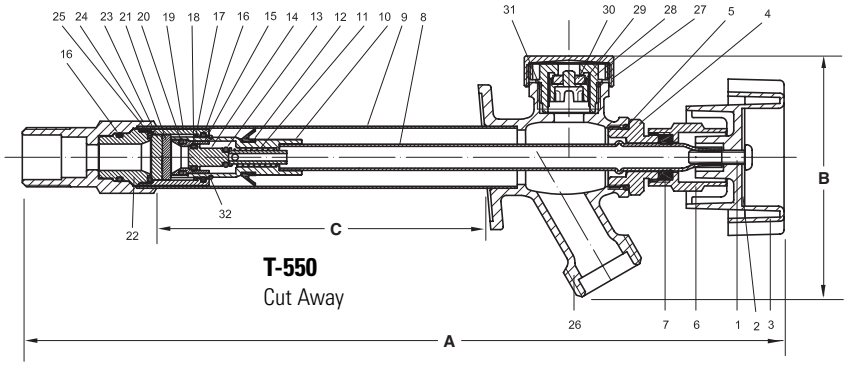

T-550
Cut Away

WARNING: Hose must be removed in order to prevent freezing or warranty will be null & void!

MATERIAL SPECIFICATION

	PART	MATERIAL	SPECIFICATIONS
1	Handle screw	Brass	JIS C2600
1	Handle screw	Brass	JIS C2600
2	Identification plate	Aluminum	
3	Handwheel	Aluminum & TPR	
4	Bonnet nut	Forged Brass, chrome plated	ASTM B16 UNS C36000
5	Bonnet nut O-ring	NBR (Nitrile Rubber)	Commercial grade
6	Packing nut	Forged Brass, chrome plated	ASTM B16 UNS C36000
7	Stem packing	NBR (Nitrile Rubber)	Commercial grade
8	Stem	Brass	ASTM C27000
9	Outer Tube	Brass	ASTM C27000
10	Cartridge Stem	Forged Brass, chrome plated	ASTM B16 UNS C36000
11	Spring	Stainless Steel	AISI 304
12	Cup Washer	NBR (Nitrile Rubber)	Commercial grade
13	O-Ring	EPDM	Commercial grade
14	Check Valve Piston	Forged Brass	ASTM B16 UNS C36000
15	Spacer	Forged Brass	ASTM B16 UNS C36000
16	O-Ring	Fluoroelastomer	Dupont Viton
17	Cartridge Packing	PTFE	Dupont Teflon
18	O-Ring	EPDM	Commercial grade
19	Cartridge Body	Brass	ASTM B16 UNS C36000
20	Spacer O-Ring	EPDM	Commercial grade
21	Ceramic Disk	Ceramic	Commercial grade
22	Cartridge End	Forged Brass	ASTM B16 UNS C36000
23	Ceramic Disk	Ceramic	Commercial grade

MATERIAL SPECIFICATION

	PART	MATERIAL	SPECIFICATIONS
24	End Adapter	Forged Brass, chrome plated	ASTM B16 UNS C36000
25	O-Ring	EPDM	Commercial grade
26	Exterior body	Brass, chrome plated	ASTM B584 UNS C85700
27	Vacuum breaker cap	Forged Brass, chrome plated	ASTM B16 UNS C36000
28	Vacuum breaker body	POM	COPOLYMER 090
29	Vacuum breaker disk	POM	COPOLYMER 090
30	Vacuum breaker seat	NBR (Nitrile Rubber)	Commercial grade
31	Vacuum breaker O-ring	NBR (Nitrile Rubber)	Commercial grade
32	Retaining Clip	Stainless Steel	AISI 304
33	O-ring	Fluoroelastomer	Dupont Viton
34	Adapter lock-ring	Forged Brass, chrome-plated	ASTM B16 UNSC36000
35	Adapter O-ring	NBR (Nitrile Rubber)	Commercial Grade
36	Socket adapter	Virgin CPVC resin	ASTM D1784

*denotes CPVC solvent-weld inlet connection

DIMENSIONS

Size	A	B	C (nominal length)
4"	9.81	3.49	3.67
6"	11.77	3.49	5.67
8"	13.77	3.49	7.67
10"	15.81	3.49	9.67
12"	17.81	3.49	11.67
14"	19.81	3.49	13.67