

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

CLEARLOC™ PUSH-TO-CONNECT FITTING SYSTEM



ClearLOC Fittings

Designed for use in domestic and commercial applications for hot & cold potable water distribution systems, and various other piping systems approved for installation: above and below ground and behind the wall without access panels.

If directly buried in soil, the fitting should be wrapped in silicon tape.

Can be used in compressed air distribution systems, with a maximum of 25 mg/m3 of oil concentration.

ClearLOC fittings can be installed onto PE-RT, PEX, CPVC, and Copper.

Using the available release tools, they are removable and re-usable.

All configurations are shipped with insert stiffeners for PE-RT/PEX tubing installations. (Must be installed)

Available in nominal sizes 1/2", 3/4", and 1", in various configurations.



**Pictured:
ClearLOC Drop Ear**



**Pictured:
ClearLOC Tee**



Working Pressure, Non-Shock (PSI)

Cold Working Pressure (CWP): 250 psi, Max Temperature of 200°F*

Saturated Steam: Not suitable for steam applications

**CAUTION! May exceed the maximum service temperature or pressure of the PE-RT / PEX or CPVC tubing.*

MATERIAL SPECIFICATION		
PART	MATERIAL	QTY.
1 Body	PPSU	1
2 O-Ring	EPDM	1
3 Protector Ring	POM	1
4 Grip Ring	Stainless Steel	1
5 Body Collar	Stainless Steel	1
6 Release Collar	POM	1
7 Insert Stiffener	POM	1

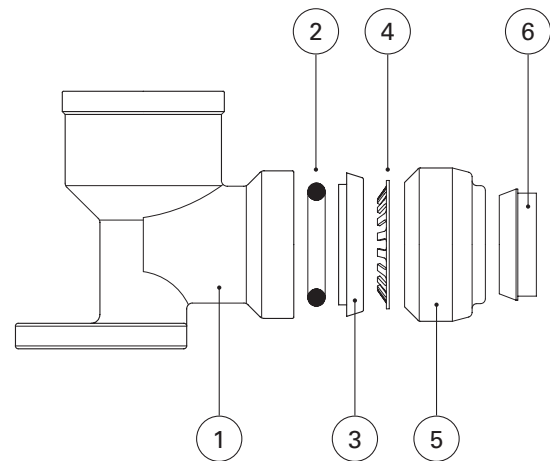

**Pictured:
ClearLOC Drop Ear
Cut-away**

Certifications/Listings:

Third-Party certified.

NSF/ANSI 14: Plastic piping system components and related materials.

NSF/ANSI 61: Drinking water system components - Health effects.

NSF/ANSI 372: Drinking water system components - Lead content.

ASSE 1061: Performance requirements for push-fit fitting.

Uniform Plumbing Code (UPC)

Uniform Plumbing Code Canada (cUPC)

Standards:

ANSI/ASME B1.20.1 (pipe-threaded configurations only): Pipe Threads, General Purpose (Inch)