

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

COPPER CRIMP RINGS

CRIMP RINGS

360° uniform compression surface pressure.

For use with on ASTM F876 / F877 PEX and ASTM F2623 / F2769 PE-RT

Not for use with PEX-AL-PEX.


MATERIAL SPECIFICATION	
PART	MATERIAL
1 Crimp ring	Copper

DIMENSIONS			
	A	B	C
3/8"	0.63	.06	0.32
1/2"	0.75	.06	0.32
3/4"	1.00	.06	0.32
1"	1.25	.06	0.35
1-1/4"	1.50	.06	0.55
1-1/2"	1.77	.07	0.65
2"	2.30	.07	0.75



Pictured:
Copper Crimp Ring

Pictured:
Standard Crimp

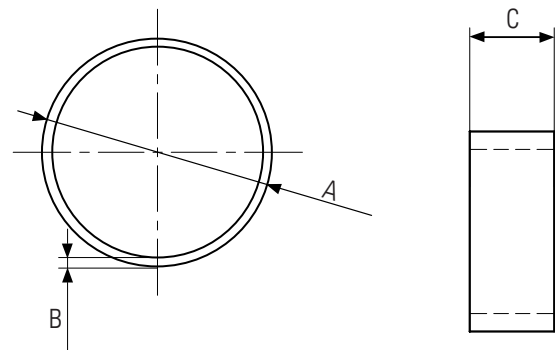

Certifications/Listing:

Third-party certified

ASTM F1807: Metal insert fittings utilizing a copper crimp ring or stainless steel clamps.

ASTM F2159: Plastic insert fittings utilizing a copper crimp ring or stainless steel clamps.