

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

LEAD-FREE PEX F1960 WATER METER COUPLING

T-4213NL

Designed to provide a secure and reliable connection between the water meter and water piping.

Barbed end connections are designed for use with PEX tubing that conforms to ASTM F876 and F877 or PE-RT tubing that conforms to ASTM F2769.

These fittings are intended for use in cold - and hot - water distribution (potable) systems.

Working Pressure, Non-Shock (PSI)

Cold Working Pressure (CWP): 250 psi - 180°F Max

DIMENSIONS - INCH		
Size	A	B
1/2" PEX x 3/4" FIP (NPSM)	1.48"	1.26"
3/4" PEX x 1" FIP (NPSM)	1.83"	1.49"
1" PEX x 1-1/4" FIP (NPSM)	2.08"	1.91"

MATERIAL SPECIFICATION		
Part	Material	
1 Meter Nut	Cast Brass	
2 Nipple	Lead-Free Cast Brass	
3 Gasket	NBR	

Certifications/Listings:

Third-party certified.

NSF/ANSI 14: Plastic piping system components and related materials.


NSF/ANSI 61: Drinking water system components - Health effects.

Standards:


ASTM F1960: Cold expansion fittings with PEX reinforcing rings for use with cross-linked polyethylene (PEX) tubing.

ANSI/ASME B16.18: Cast pressure alloy solder-joint pressure fitting.


ANSI/ASME B1.20.1: Pipe threads, general purpose, inch.

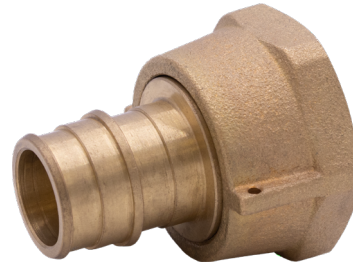

Pictured:
T-4213NL

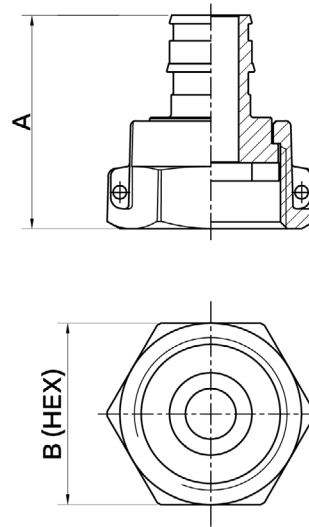

Pictured:
T-4213NL Dimensional/Section View

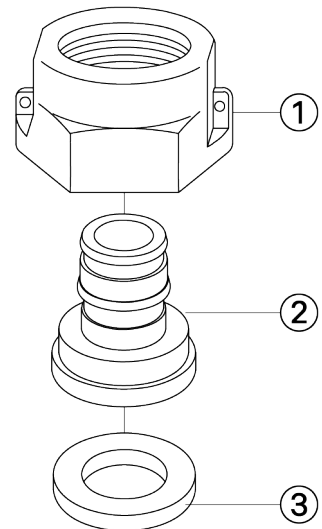

Pictured:
T-4213NL Exploded View