LEGEND
PLUMBING • INDUSTRIAL • COMMERCIAL • HYDRONICS

www.legendvalve.com
800-752-2082

## SUBMITTAL SHEET

| | |
|---|---|
| JOB NAME | ITEM TAG |
| JOB LOCATION | PART NUMBER |
| CONTRACTOR | DATE |
| ENGINEER APPROVAL | DATE |

# MULTI-TURN FROSTFREE SILLCOCK

## T-552, T-552P, and P-552

Durable chrome-plated body offers superior corrosion resistance over unplated versions.

Extended-hub handwheel moves the operator's hands away from the sharp hose bibb threads.

Equipped with an anti-siphon vacuum breaker and internal check valve, to prevent backflow into the potable water system.[1]

Available in various connection types, in 4", 6", 8", 10", 12" and 14" nominal lengths.



### MATERIAL SPECIFICATION

| | PART | MATERIAL |
|---|---|---|
| 1 | Exterior body | Brass, chrome plated |
| 2 | Outer tube | Brass, chrome plated |
| 3 | End adapter | Chrome plated forged brass |
| 4 | Bonnet nut assembly | Forged brass, chrome plated / Other |
| 5 | Handwheel | Cast zinc-aluminum, coated |
| 6 | Vacuum breaker assembly | Chrome plated forged brass / POM |
| 7 | Stem assembly | Forged Brass / Other |


LegendPress®


MNPT/FNPT


MNPT/Sweat


PEX (F1807)

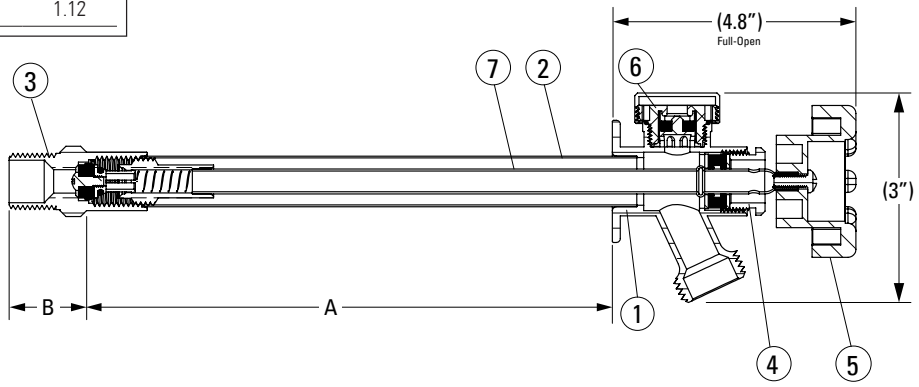

PEX (F1960)

### DIMENSIONS - Inch

| Size | A |
|---|---|
| 4" | 4" |
| 6" | 6" |
| 8" | 8" |
| 10" | 10" |
| 12" | 12" |
| 14" | 14" |

### DIMENSIONS - Inch

| Inlet Type | B |
|---|---|
| 1/2" MNPT / 1/2" Sweat | 1.06 |
| 1/2" PEX (F1807) | 1.12 |
| 1/2" PEX (F1960) | 1.25 |
| 1/2" Press | 1.81 |
| 3/4" MNPT / 1/2" FNPT | 1.12 |




**Pictured:**
**T-552**
Cut-away

**Certifications/Listings:**

Third-Party certified.

ASSE 1019-A: Performance requirements for wall hydrant with backflow protection and freeze resistance.

**Standards:**

ANSI / ASME B1.20.1: Pipe threads, general purpose, inch (MNPT & FNPT).

ANSI / ASME B16.18: Cast pressure alloy-solder-joint pressure fitting (CTS solder).

ASTM F1807: Metal insert fittings utilizing a copper crimp ring or stainless steel clamps.

ASTM F1960: Cold expansion fittings with PEX reinforcing rings.

ANSI / ASME B16.51: Copper and copper alloy press-to-connect pressure fittings.

ANSI / ASME B1.20.7 (male garden hose outlet).

[1]This device must not be subjected to more than 12 hours of continuous water pressure. The hose must be removed in order to prevent damage from freezing.